


Note: Mouse upgrade can only be done in wired mode, receiver upgrade requires the receiver to be plugged into the computer USB port.





After the upgrade is completed, it is usually recommended to use the driver to restore the factory settings


1, this is the mouse and receiver firmware upgrade package, is a compressed format, different versions of the firmware name will have some different, the first step we need to decompress it (right click to decompress)


 dfu_for_Darmoshark_M3_fw2.0.1r-d_dongle_fw_e.1.0r-3_en.rar





Like The following figure: after decompression there will be four files, two of them in .jfw format ,one is the mouse firmware, one is the receiver firmware, which with the word “mouse” is the mouse firmware, with the word “dongle” is the receiver firmware.


 Darmoshark_dongle_fw-e.1.0r-3.jfw
 Darmoshark_m3_true_2k_fw2.0.1r-d.jfw
 Generic DFU_v1.06 en.exe
 setting.ini

 Generic DFU_v1.06 en.exe

2. Double click  Generic DFU_v1.06 en.exe Open this upgrade software, and then click the "Select..." button, a selection box will pop up, by default, there will be two .jfw format firmware files, with the word mouse is the mouse firmware, usually first double-click the mouse firmware, select it, to the mouse for upgrading.

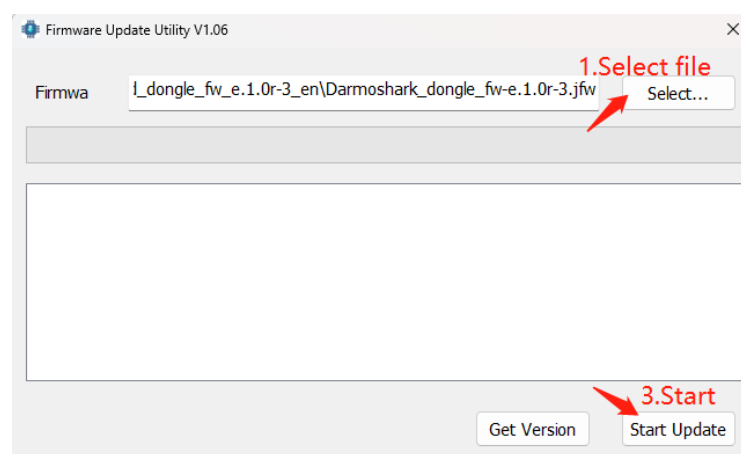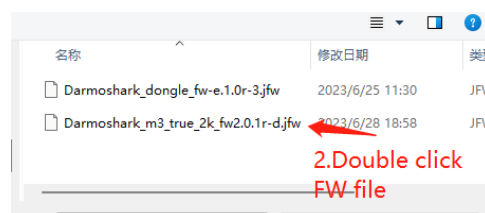

3 . Once you have selected the firmware, you can click the "Start Update" button until the progress bar and dialog box indicate that the upgrade is complete, as shown below.

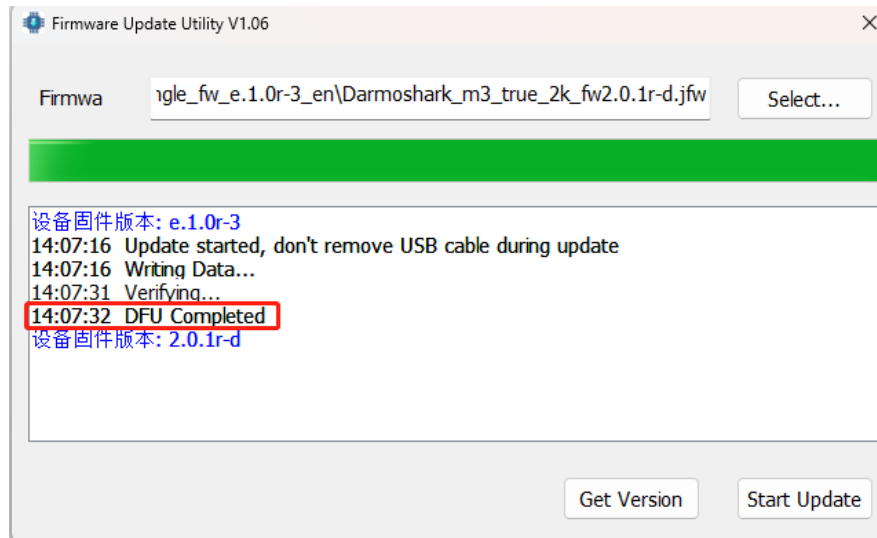

4, After step 3 upgrade is complete, if you still need to upgrade the receiver, repeat step 2 again, select the receiver's firmware, and then click Start Update until the upgrade is complete.